




**MASON INDUSTRIES, Inc.**  
 Manufacturers of Vibration Control Products  
 NY Mailing Address: PO Box 410, Smithtown, NY 11787  
 350 Rabro Drive 2101 W. Crescent Ave., Suite D  
 Hauppauge, NY 11788 Anaheim, CA 92801  
 631/348-0282 714/535-2727  
 FAX 631/348-0279 FAX 714/535-5738  
 Info@Mason-Ind.com Info@MasonAnaheim.com

**CERTIFIED FOR**  
**JOB NAME** :  
**CUSTOMER** :  
**CUSTOMER P.O.** :  
**MASON M.I.** :  
**DWG. NO.** :

**TYPE**  
**HD**  
 Double Deflection  
 Neoprene Hangers

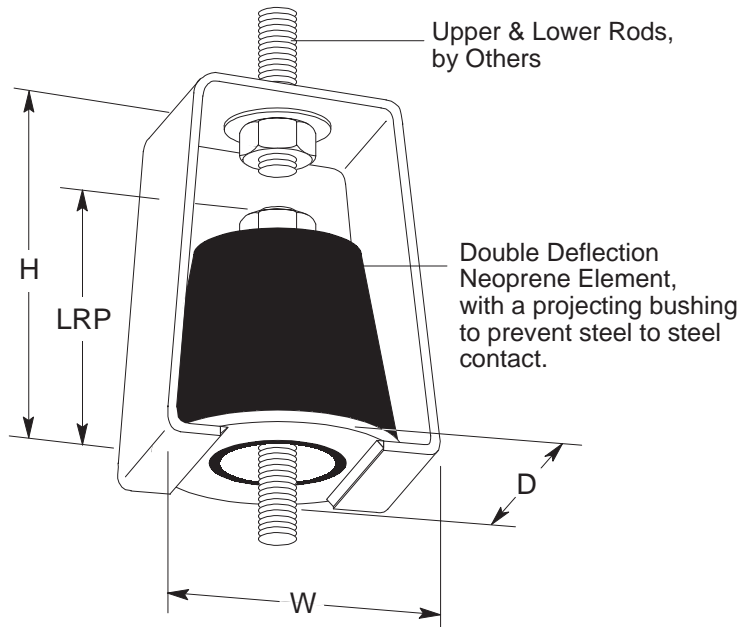

**TYPE HD RATINGS**

Size (Color Mark)	Durometer	Rated Capacity Range [Kg]	Max. Rated Deflection [mm]
HD-Green	40	Up to 16	5
HD-White	60	16 - 34	5
HD-A-Black	30	Up to 20	9
HD-A-Green	40	14 - 34	9
HD-A-Red	50	27 - 57	9
HD-B-Red	50	Up to 107	10
HD-B-White	60	82 - 172	10
HD-B-Yellow	70	145 - 295	10
HD-BS-Blue	70	227 - 454	10
HD-CS-Blue	70	454 - 953	10
HD-DS-Blue	70	953 - 1905	10

Hanger elements have straight line deflection curves.

LRP - Lower Rod Penetration  
 MRD - Maximum Rod Diameter

**TYPE HD DIMENSIONS (mm)**

Size	D	H	W	LRP	MRD
HD	44	57	48	32	10
HD-A	51	70	57	57	13
HD-B	83	114	108	76	19
HD-BS	83	114	108	76	19
HD-CS	83	127	108	83	22
HD-DS	102	159	121	83	22

**CERTIFICATION DATA**

TAG : \_\_\_\_\_  
 UNIT : \_\_\_\_\_

PLAN VIEW OF HANGER LOCATION :



**\_\_\_\_\_ mm SPECIFIED DEFLECTION**

1 :	6 :
2 :	7 :
3 :	8 :
4 :	9 :
5 :	10 :
Material for One Set :	Sets Required

DWN : \_\_\_\_\_ CHKD: \_\_\_\_\_ DATE : \_\_\_\_\_

DWG NO. : \_\_\_\_\_